MAXHUB

MAXHUB ULTRA-WIDE SERIES

The 21:9 aspect ratio display has been specially crafted to enhance and enrich meeting collaborations.
It connects users to a more seamless and richer visual experience.
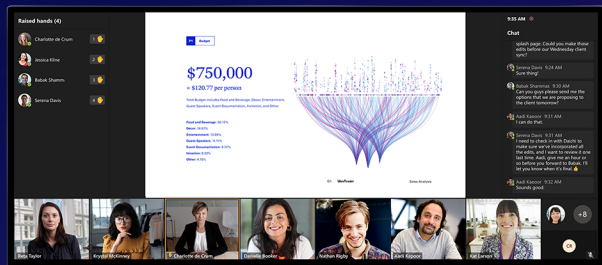
21:9   5K 5K Display   Empowered by Microsoft Teams Rooms
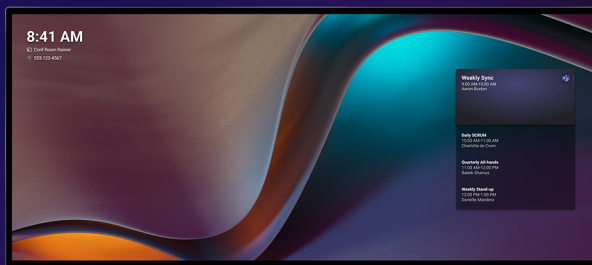
MEETING WITHIN THE MEETING

Empowered by the Signature Microsoft Teams Rooms, the MAXHUB UW Series brings us a more immersive hybrid meeting experience.

IDEAL PLATFORM TO PERFORM

This next-generation display is enhanced to be compatible with all the leading industry collaboration software. Invigorate every interchange with smoother, more engaging meetings.

mago   zoom

EXPANSIVE VISION

The ultra-wide, unique aspect ratio of 21:9 has 33% more visual canvas than comparable models.This futuristic, ultra-wide display has been engineered to illuminate every visual experience as seamless and striking as possible.Designed especially for larger spaces, hybrid meetings, commercial displays, educational experiences, or control centers, everything is always in view and crystal clear.

16:9   21:9

33%

*Only available for screensharing.

PROFESSIONAL 5K DISPLAY

Keep an eye on all the details with a striking 5K-resolution display. Carefully engineered to optimize each pixel, 5K clarity illuminates the softest hue and the most delicate detail.

5K Carefully engineered to optimize each pixel, 5K clarity illuminates the softest hue and the most delicate detail.

Panoramically wide viewing angle lights up every corner of the room. No blind spots, just pure visibility.

A professional, commercial-grade anti-dust, anti-reflective coating insures long-lasting durability.

TYPE-C VERSATILITY

Interchange ideas, power up productivity and share more content with the multi-functional Type-C port.

DESIGNED FOR DIVERSE FUNCTIONALITY

The panoramic viewing angle, large size, and 5K definition blend together to create a display that seamlessly matches the demands of hybrid working, commercial display, command & control, and a host of other professional situations.

SIGNATURE MICROSOFT TEAMS ROOMS

HYBRID WORKING

COMMERCIAL DISPLAY

COMMAND AND CONTROL

COMPLETE REMOTE DEVICE CONTROL

Easy-to-use functionality compatible with major control and automation tools offered by companies such as Crestron, Q-SYS and Extron.

SET-UP FOR BYOD

Experience seamless collaborative meetings with effortless plug-and-play setup, automatic device activation, and powerful dual 16W + 15W speakers for impactful content sharing.

MAXHUB DEVICE MANAGEMENT

MAXHUB Pivot equips a streamlined remote control device management system. Smooth, fuss-free interactions every time.

WIRELESS SHARING

Elevate collaboration with instant device-to-screen sharing using the MAXHUB Share App, allowing up to nine devices to share screens simultaneously and enhance productivity.

SPECIFICATION

MAXHUB Commercial Display - UW Series

Display

Screen Size (class)	105
Diagonal	105" / 266.7cm
Panel Type	VA
Haze	25% (Anti-Glare)
Aspect Ratio	21:9
Native Resolution	5120*2160
Refresh Rate	60Hz
Brightness (Typ.)	400 nits
Backlight Type	Direct Lit
Contrast Ratio	4000:1
Viewing Angle (H x V)	178°(H / V)
Response Time	6.5ms
Life Time (Min.)	≥50,000 hours
Operation Hours (Hours / Day)	16/7
Orientation	Landscape

Internal Player

Processor	A76*4+A55*4
Graphic	Mali-G610 MP4
Memory	8G
Storage	64G
Operating System	Android 13.0
UI Resolution	5K

Connectivity

Input	HDMI 2.0 x3 (Max: 3840 x2160@60Hz)
	HDMI 2.1 x1 (Max: 5120 x2160@60Hz)
	USB Type-C x1(PD100W)
	USB Type-A 3.0 x4
	USB Type-A 2.0 x1
	RJ45 in x1
	Display Port x1 (Max: 5120 x2160@60Hz)
Output	HDMI out 2.0 x1
	SPDIF x1 (Optical)
	Audio out x1 (3.5mini jack)
	RJ45 out
External Control	RS232 x1 / IR Receiver
Wi-Fi	Removable Wi-Fi Module
	Wi-Fi 6 Support
	2.4G&5G
	802.11ac/b/g/n/a/ax
OPS Slot	Yes

Mechanical Specification

Product Dimension (W x H x D)	2511 x 1124 x 97mm
	100.55 x 44.25 x 3.82 inch
Package Dimension (W x H x D)	2668 x 1305 x 280mm
	105.04 x 51.34 x 11.02 inch
Product Weight (Net)	89.4kg

Package Weight (Gross)	119.5kg
VESA Mount (mm)	1000 x 400
Handle	Yes

Sensor

Motion Sensor	Yes
Light Sensor	Yes

Environmental Conditions

Operation Temperature	0°C ~ 40°C
Operation Humidity	10% ~ 90%RH
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10% ~ 90%RH

Power

Power Supply	100-240V~50/60Hz
Power Consumption (Typical)	550W
Power Consumption (Max)	665W

Sound

Speaker Power Output	2 x 16W + 15W

Certification

Safety	IEC 62368-1
EMC	Class B
ErP	Yes
Energy Star	Yes

Features

Built-In Media Player	Yes
Device Management System	MAXHUB Pivot
Screen Share	MAXHUB Share

Accessory

Included in the package	Power Cord, Wi-Fi Module x1, HDMI Cable (2m|6.56feet) x1 , Remote Control x1, Wall Mount x1, USB-C Cable (1.8m|6feet) x1
Optional	OPS62A OPS72A

Warranty

Display	3 year